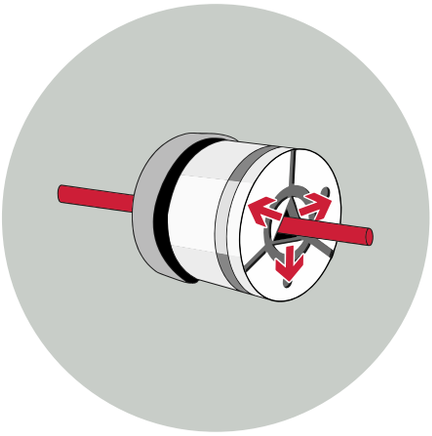

DMH DIFFERENTIAL PRESSURE CLAMPING

Facilitates direct clamping of thin semi-finished products in the hydraulic clamping chuck. Suggested use in billet loaders.

DETAILS	DIFFERENTIAL PRESSURE CLAMPING
Min. differential pressure	5 bar